

## Panasonic NS-700 Adding Additional Ports to UC (Voice Mail/AA) Telquest Tech Support

**You must purchase additional Activation Keys for additional UC (Voice Mail/AA) Ports**


**KXNSU-102 = 2 additional ports**

**KXNSU-104 = 4 additional ports**


**Maximum of 24 ports**

**I am adding 2 additional UC ports to my system in this example.**

**After you install the Activation Keys you must also do the following:**

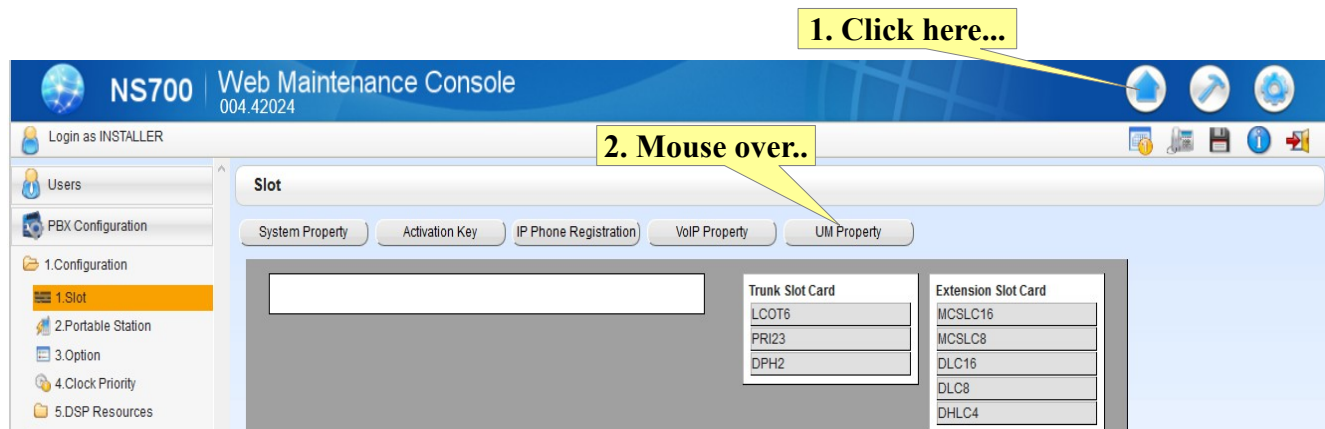

**You are still on the same screen....**

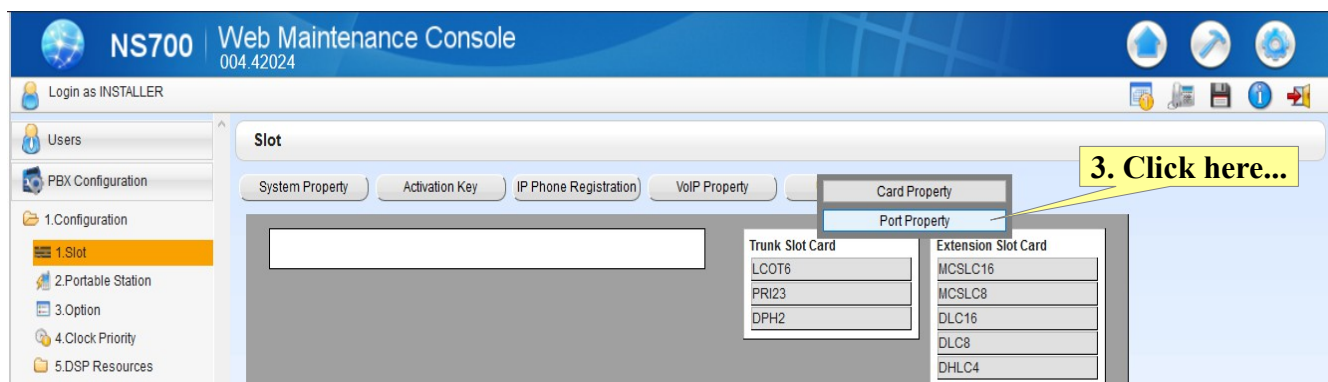

## Add the new Extension Numbers for the additional UC ports

If you are adding more than 2 additional UC Ports, just continue on with incremented Extension Numbers.

**Virtual UM Port Property**

Port	Extension Number	Connection
1	592	INS
2	593	INS
3	594	OUS
4	595	OUS
5		OUS
6		OUS
7		OUS
8		OUS
9		OUS
10		OUS
11		OUS
12		OUS
13		OUS
14		OUS
15		OUS
16		OUS
17		OUS
18		OUS
19		OUS

**Command**

Shelf: 1 - Slot: 8 - Port: 3

INS OUS Cancel

Page 1 of 1 40 View 1-24 of 24

OK Cancel Apply

When done, it should look like this

**Virtual UM Port Property**

Port	Extension Number	Connection
1	592	INS
2	593	INS
3	594	INS
4	595	INS
5		OUS
6		OUS

## **Special Note**

**The Time and Date on the system MUST be correct or else the installation of Activation Keys will be accepted but will not show up in the Activated Features.**

**You can test the new Ports by dialing their extension number.**

**You should be answered UM/Voice Mail System.**

**If you get a Busy Signal, something is wrong and you need to verify all of your changes.**