

## Panasonic KX-NS700 Connecting to DLC8 & 16 Digital Station Card Telquest Tech Support

**This is also for the KX-NS5171 8 Port Digital Extension Card  
The 8 Port Digital Station Card only has two 8 Pin Jacks on it.**


### 4.5.5 DLC16 Card KX-NS5172

#### Function

16-port digital extension card for DPTs and PT-interface CSs.

#### Note

When using a DLC16 card, the LPR software version must be 2.0 or later.

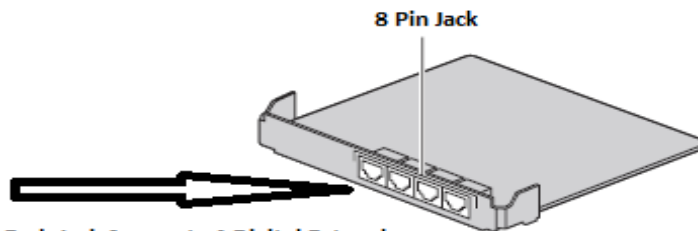

**Note:**  
The Pin Assignments are NOT Standard.


You **CANNOT** use a standard "Patch Cord" type of cable.

You **MUST** make your own cables using the diagram below.

Read this...

Then read this...

#### Pin Assignments In the 8 Pin Modular Plug

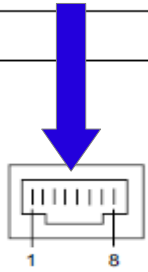

No.	Signal Name	Function
1	D1A	Data port 1 (Low)
2	D2A	Data port 1 (High)
3	D1B	Data port 2 (Low)
4	D1C	Data port 3 (Low)
5	D2C	Data port 3 (High)
6	D2B	Data port 2 (High)
7	D1D	Data port 4 (Low)
8	D2D	Data port 4 (High)

