


Panasonic KX-NS700 Connecting to Built In Analog Station Ports Telquest Tech Support

There are 4 Analog Station Ports available on the front of the KSU

4.3.5 MCSLC4 in the Main Unit (installed by default)

Function

- 4 extension ports for SLT with Caller ID (FSK), Message Waiting Lamp control, and 2 power failure transfer (PFT) ports. Maximum power output of 90 V for Message Waiting Lamp control.

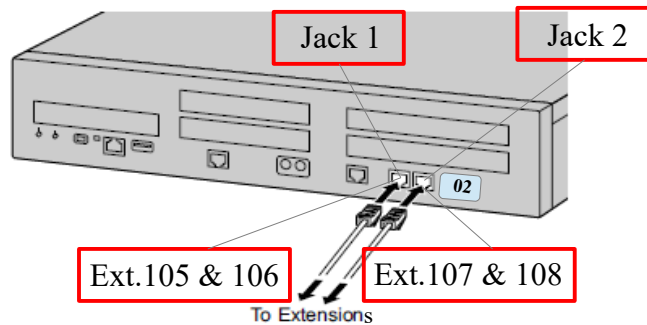

Note

- For details about power failure transfer, refer to "4.12 Power Failure Connections".

Pin Assignments

For MCSLC4 port 1-2 and port 3-4

	No.	Signal Name	Function	
	1	TA	Tip port 1	
	2	RA	Ring port 1	
	3	Reserved	—	
	4	Reserved	—	
	5	Reserved	—	
	6	Reserved	—	
	7	TB	Tip port 2	
	8	RB	Ring port 2	

