

# **Avaya IP Office Essential Edition**

## **Installing a 3<sup>rd</sup> Party SIP Phone**

### **Telquest Tech Support**

**You can add 3<sup>rd</sup> party SIP telephones and other SIP devices to this system.**

**You must first order and install a license.**

**Licenses come in different sizes. Single to multiple SIP Stations.**

**A Single Endpoint (SIP Station) License will look like this on the order info:**

**Part Number: 174956**

**Descr:IPO LIC IP ENDPOINT RFA 1 LIC:CU – RFA**

**It's also identified in different areas as:**

**IP End-points**


**IPENDPOINT**

**IPO LIC IP ENDPOINT RFA 1 LIC:CU**

**3rd Party IP Endpoints**

**Please keep in mind that not all IPO Essential features may work with your particular 3<sup>rd</sup> party SIP phone.**

After you have installed your license,

 Extension

Right Click Here...

Mouse over New

Click on SIP Extension

New

- CutCtrl+X
- CopyCtrl+C
- PasteCtrl+V
- DeleteCtrl+Del
- Validate
- Connect To...Ctrl+T
- Show In Groups
- Customize Columns...

H323 Extension

IP DECT Extension

SIP Extension

2

3

4

5

6

7

8

0

0

0

Port

Force Authorization

The Extension ID is just A reference number

Give it an Extension Number

Extension			
Id	Extension	Module	Port
1	0	BD1	1
2	202	BD1	2
3	203	BD1	3
4	204	BD1	4
5	205	BD1	5
6	206	BD1	6
7	207	BP1	7
8	208	BP1	8
25	209	BP2	1
26	210	BP2	2
49	8003	BD3	1
50	8004	BD3	2
51	8005	BD3	3
52	8006	BD3	4
53	8007	BD3	5
54	8008	BD3	6
55	8009	BD3	7
56	8010	BD3	8
8000	8000	0	0
8001	8001	0	0
8002	8002	0	0

SIP Extension: 8002 8002

ExtnVoIPT38 Fax

Extension Id8002

Base Extension8002

Caller Display TypeOn

Reset Volume After Calls


Device typeUnknown SIP device

Module0

Port0

Force Authorization

Next:

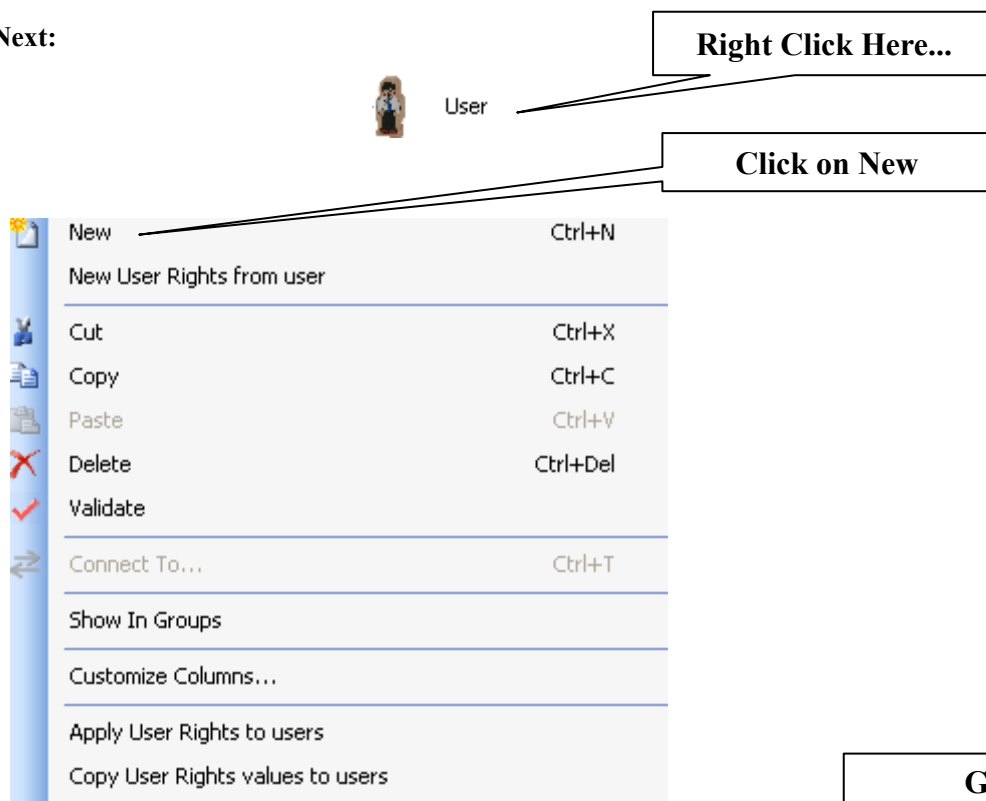

Next:

