


# Avaya IP Office Essential

## How to Upgrade the KSU to 8.0(44)

### Telquest Tech Support

If you do not have the Avaya Manager software already installed in your computer, skip to the link on Page 2.

First, lets look and see what version is in the KSU.

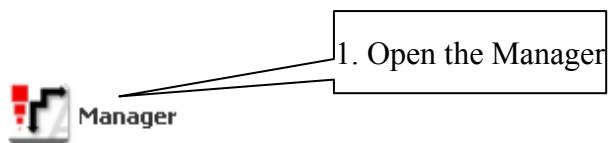

## WELCOME to IP Office Administration

What would you like to do ?


[Create an Offline Configuration](#)

[Open Configuration from System](#)


[Read a Configuration from File](#)

2. Click here...

3. Look at the Version Number.  
If it is 8.0(5) or lower it needs to be Upgraded

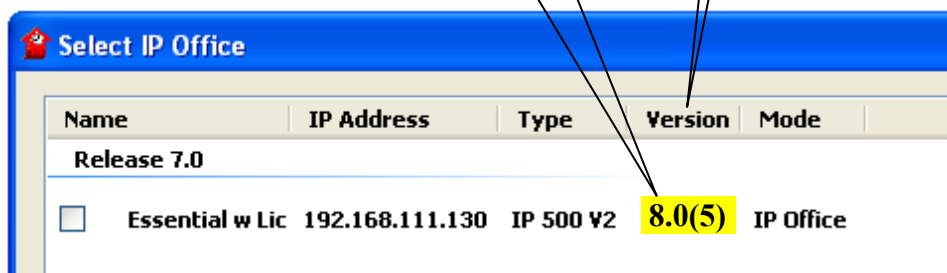


4. Click Cancel...

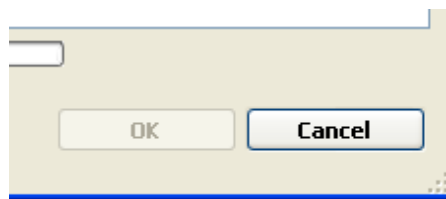

Page 2    **A link to a Youtube Video explaining Unzip** <http://www.youtube.com/watch?v=9gj3qTcjM8s>

**Lets see what version of the Manager is in your computer.**

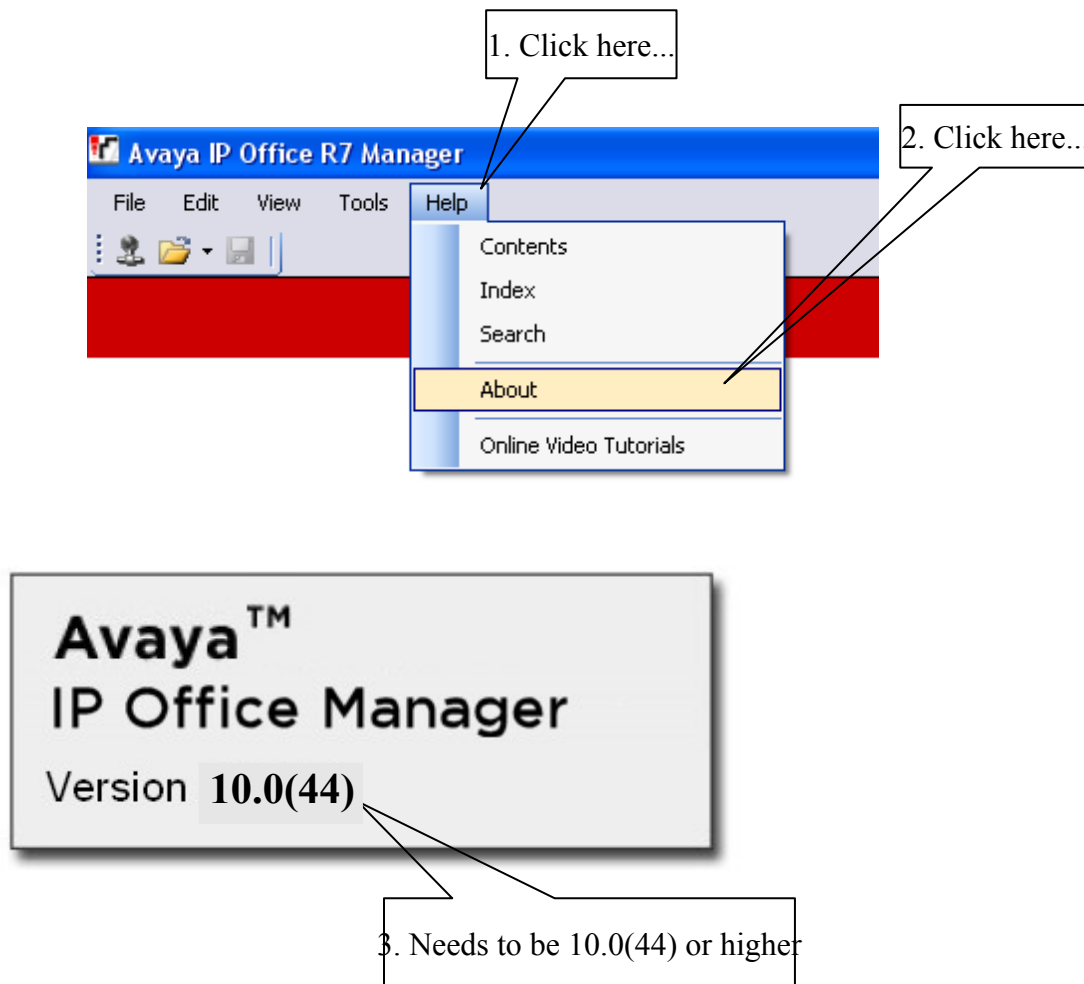

If you have Manager Version 9.0(12) or higher, you may begin the Upgrade.

If you don't have Manager Version 9.0(12) or higher, click the Avaya direct download link and get it.

[ftp://ftp.avaya.com/incoming/Up1cku9/SoftwarePub/8\\_0GA\\_Builds/ADMIN/ADMIN8\\_0\\_44.exe](ftp://ftp.avaya.com/incoming/Up1cku9/SoftwarePub/8_0GA_Builds/ADMIN/ADMIN8_0_44.exe)

**Click on this is the link to get the Avaya 8.0(44) software**

After the download is done, look at the Youtube Video link below:

The video is for a previous version (6.0) but the methods are still the same.


[http://www.youtube.com/watch?v=1kEV3BliYP8&feature=results\\_video&playnext=1&list=PL3F0CC188391F1402](http://www.youtube.com/watch?v=1kEV3BliYP8&feature=results_video&playnext=1&list=PL3F0CC188391F1402)

It takes over 45 minutes on a Cable Modem to download the above link.

It also takes over an hour to perform the Upgrade.


During the Upgrade, the KSU will reboot.

## The Upgrade

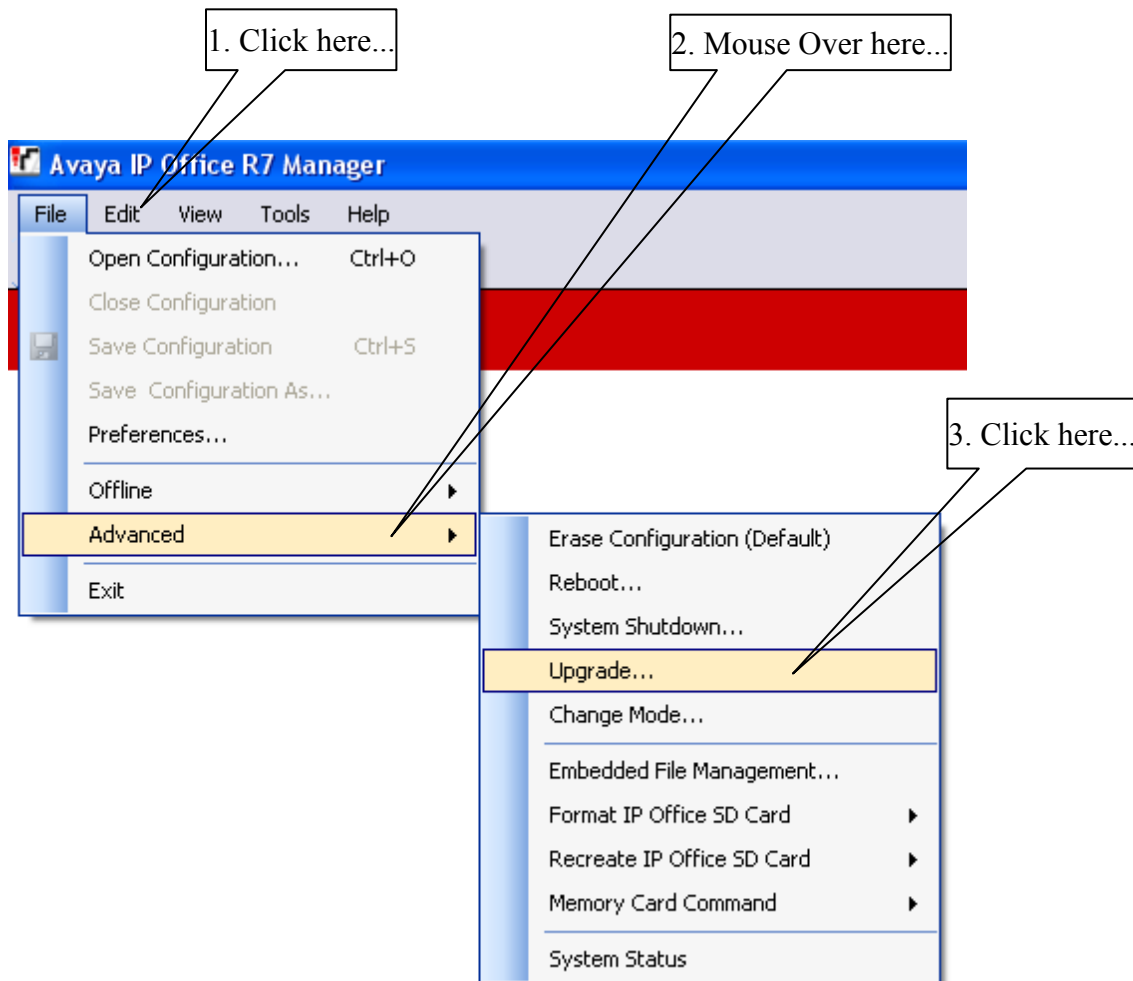


**Note: If the Upgrade fails, try turning off any Firewall or Anti Virus software.**

You will see something similar to this...

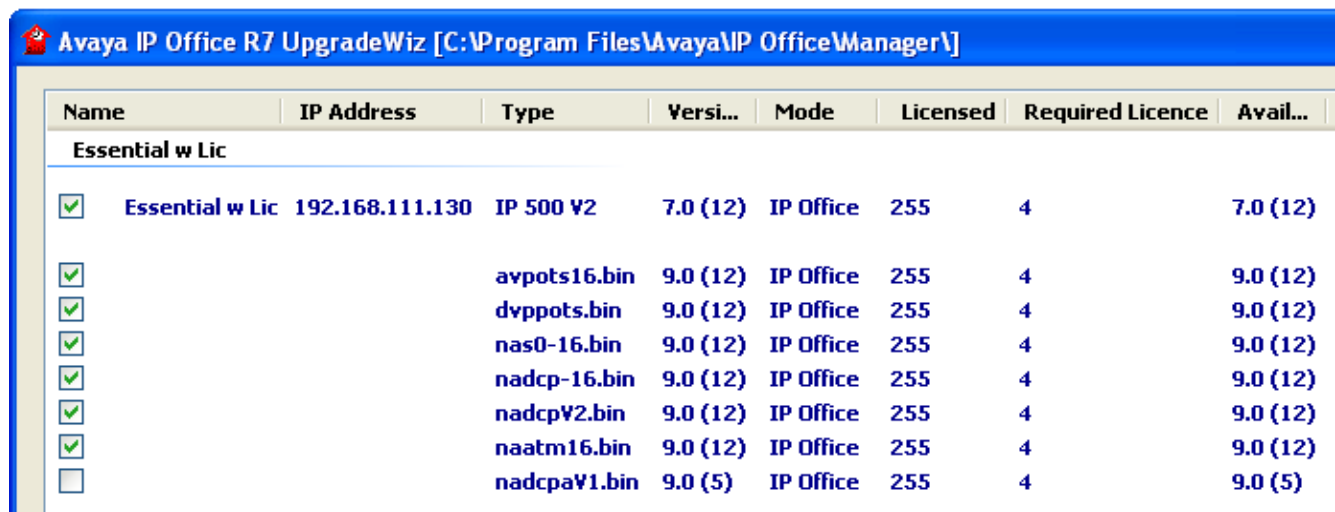

Avaya IP Office R7 UpgradeWiz [C:\Program Files\Avaya\IP Office Manager\]


Name	IP Address	Type	Versi...	Mode	Licensed	Required Licence	Avail...
<b>Essential w Lic</b>							
<input checked="" type="checkbox"/>	Essential w Lic	192.168.111.130	IP 500 V2	7.0 (12)	IP Office	255	4
<input checked="" type="checkbox"/>			avpots16.bin	9.0 (12)	IP Office	255	4
<input checked="" type="checkbox"/>			dvppots.bin	9.0 (12)	IP Office	255	4
<input checked="" type="checkbox"/>			nas0-16.bin	9.0 (12)	IP Office	255	4
<input checked="" type="checkbox"/>			nadcp-16.bin	9.0 (12)	IP Office	255	4
<input checked="" type="checkbox"/>			nadcpV2.bin	9.0 (12)	IP Office	255	4
<input checked="" type="checkbox"/>			naatm16.bin	9.0 (12)	IP Office	255	4
<input type="checkbox"/>			nadcpaV1.bin	9.0 (5)	IP Office	255	4

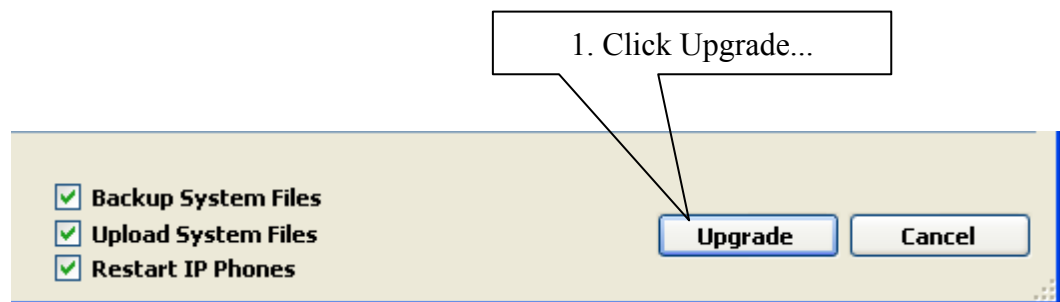

1. Click Upgrade...

☒ Backup System Files  
☒ Upload System Files  
☒ Restart IP Phones

**Upgrade** **Cancel**

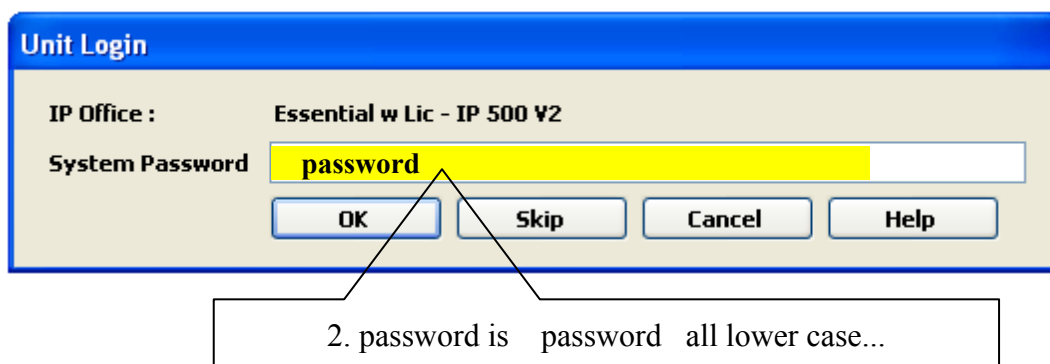

**Unit Login**

IP Office : Essential w Lic - IP 500 V2

System Password **password**

**OK** **Skip** **Cancel** **Help**

2. password is password all lower case...

You will see the Upgrade progress similar to this:



Eventually you will see a pop-up asking you if you want to continue with the Upgrade.

Click OK or Yes when you see it.

The Upgrade to the KSU will now take place.

It will take over an hour and the KSU will be re-booted during that time.

**Note:** This Help Sheet was created using Windows XP

Your screens and prompts may look different then those shown here if you use a different Operating System.

**After the Upgrade is done, I suggest Resetting the KSU to factory default.**

Please read this carefully. It does not work the way you may think it does.

Get a paperclip

On the right side rear of the KSU there is a small hole with the word RESET above it.

Place the paperclip in the hole.

Press in and HOLD until the CPU LED on the rear of the KSU begins to FLASH Orange. It will take about 10-15 seconds of pressing the Reset until the LED begins to FLASH Orange.

Once the CPU LED begins to FLASH Orange, release the RESET. You MUST release the Reset at this point or you may erase the Operating System of the KSU....

The KSU will go to factory default and it takes 4 to 5 minutes to complete.

If everything went OK, your KSU will show the new Version when you connect to it.

## **Here is an overview of the process:**

**Check to see if the KSU needs to be Upgraded.**

**Download the new Manager Program from Avaya**

**Unzip the new Manager Program into a new folder**

**Open that new folder and run Setup.exe**

**This will install the new version of Manager and overwrite your older Manager version**

**Run the Manager software**

**Locate the KSU**

**Upgrade the KSU**

**The KSU will now get the Upgraded Version of the software from the Manager program**

---