

## Panasonic KXTDA/KXTDA Series KSU's Extension Hotline Dialer Telquest Tech Support

This Help Sheet explains how to program a Hotline Dialer that will call “Extension B” when you pick up the handset on “Extension A”.


Do this on the Originating extension, “Extension A”

Set the amount of time that passes until the Hot Line Dialler starts dialing.

The setting below is set to 2 seconds. (You may need to change this to 1 second.

Press the  
Intercom button

You can set this to 1 Second for a faster

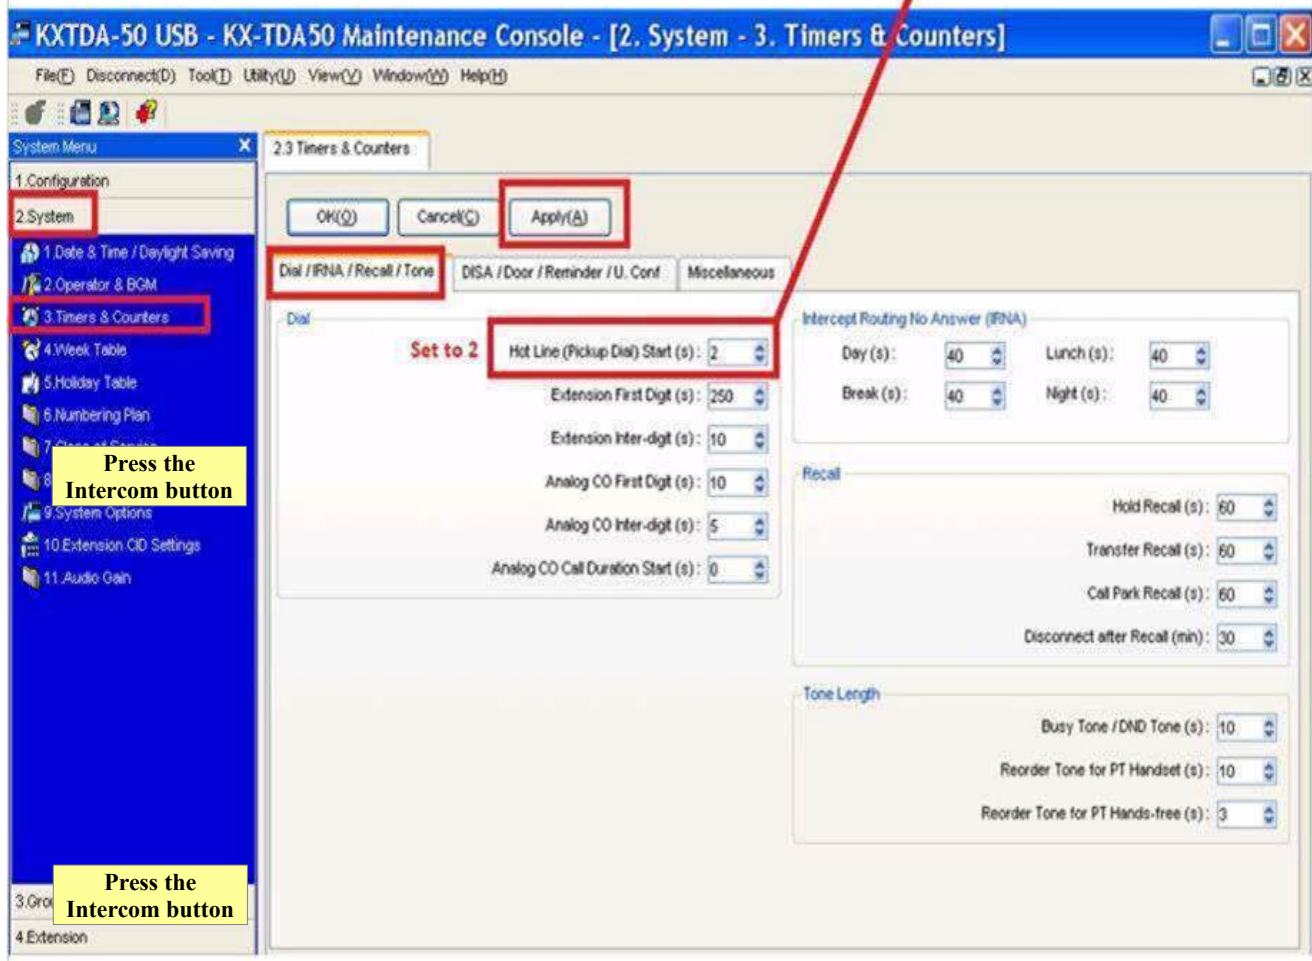

Note:

“Extension A”, the originating extension, must be programmed with “Off Hook Preference” set to Intercom.

Set the amount of time that passes until the Hot Line Dialler starts dialing.

The setting below is set to 2 seconds. (You may need to change this to 1 second.

You can set this to 1 Second for a faster

KXTDA-50 USB - KX-TDA50 Maintenance Console - [2. System - 3. Timers & Counters]

File(F) Disconnect(D) Tool(T) Utility(U) View(V) Window(W) Help(H)

System Menu

- 1. Configuration
- 2. System
- 3. Timers & Counters
- 4. Week Table
- 5. Holiday Table
- 6. Numbering Plan
- 7. Class of Service
- 8. Ring Tone Patterns
- 9. System Options
- 10. Extension CO Settings
- 11. Audio Gain

2.3 Timers & Counters

OK(O) Cancel(C) Apply(A)

Dial / IRNA / Recall / Tone DISA / Door / Reminder / U. Conf Miscellaneous

Dial

Set to 2 Hot Line (Pickup Dial) Start (s): 2

Extension First Digit (s): 250

Extension Inter-digit (s): 10

Analog CO First Digit (s): 10

Analog CO Inter-digit (s): 5

Analog CO Call Duration Start (s): 0

Intercept Routing No Answer (IRNA)

Day (s): 40 Lunch (s): 40

Break (s): 40 Night (s): 40

Recall

Hold Recall (s): 60

Transfer Recall (s): 60

Call Park Recall (s): 60

Disconnect after Recall (min): 30

Tone Length

Busy Tone / DND Tone (s): 10

Reorder Tone for PT Handset (s): 10

Reorder Tone for PT Hands-free (s): 3