


## Panasonic KXTDA-50 KSU Send Night Service Calls to Answering Service via Virtual Extension Telquest Tech Support

### Create a Virtual Extension:

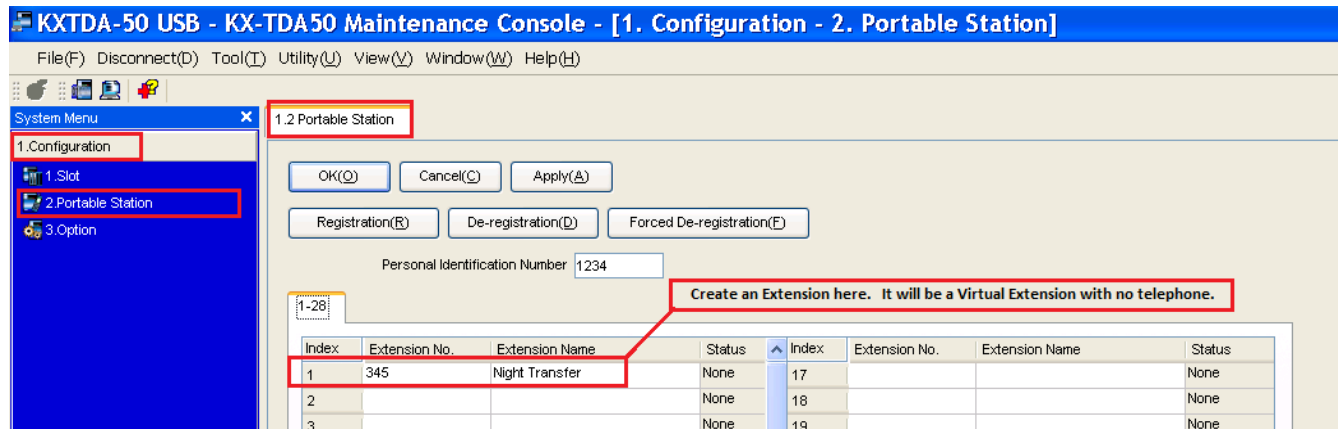

**KXTDA-50 USB - KX-TDA50 Maintenance Console - [1. Configuration - 2. Portable Station]**

File(F) Disconnect(D) Tool(T) Utility(U) View(V) Window(W) Help(H)

System Menu

1. Configuration

2. Portable Station

3. Option

1.2 Portable Station

OK(O) Cancel(C) Apply(A)

Registration(R) De-registration(D) Forced De-registration(E)


Personal Identification Number 1234

1-28

Create an Extension here. It will be a Virtual Extension with no telephone.

Index	Extension No.	Extension Name	Status	Index	Extension No.	Extension Name	Status
1	345	Night Transfer	None	17			None
2			None	18			None
3			None	19			None

### Set Forwarding of the Virtual Extension:

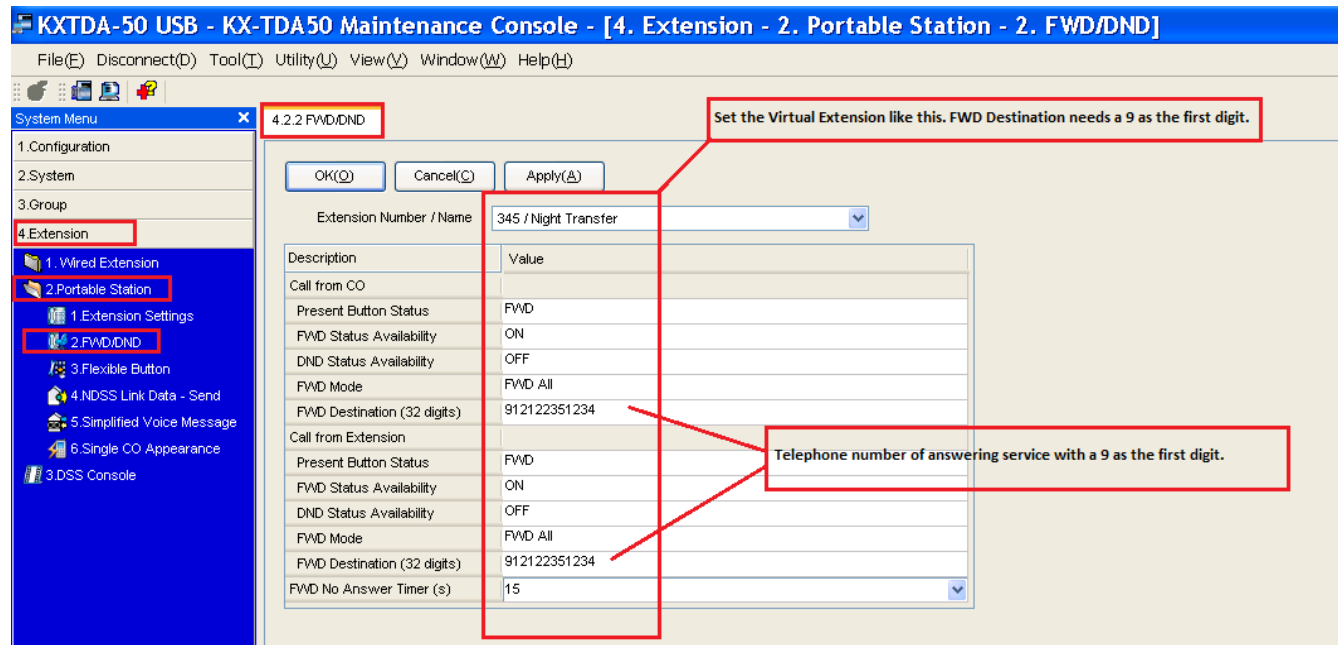

**KXTDA-50 USB - KX-TDA50 Maintenance Console - [4. Extension - 2. Portable Station - 2. FWD/DND]**

File(E) Disconnect(D) Tool(T) Utility(U) View(V) Window(W) Help(H)

System Menu

1. Configuration

2. System

3. Group

4. Extension

1. Wired Extension

2. Portable Station

1. Extension Settings

2. FWD/DND

3. Flexible Button

4. NDSS Link Data - Send

5. Simplified Voice Message

6. Single CO Appearance

3.DSS Console

4.2.2 FWD/DND

OK(O) Cancel(C) Apply(A)

Extension Number / Name 345 / Night Transfer

Set the Virtual Extension like this. FWD Destination needs a 9 as the first digit.

Description	Value
Call from CO	
Present Button Status	FWD
FWD Status Availability	ON
DND Status Availability	OFF
FWD Mode	FWD All
FWD Destination (32 digits)	912122351234
Call from Extension	
Present Button Status	FWD
FWD Status Availability	ON
DND Status Availability	OFF
FWD Mode	FWD All
FWD Destination (32 digits)	912122351234
FWD No Answer Timer (s)	15

Telephone number of answering service with a 9 as the first digit.

## Set CO Line 1 to go to the Virtual Extension when in Night service:

**KXTDA-50 USB - KX-TDA50 Maintenance Console - [10. CO & Incoming Call - 2. DIL Table & Port Settings]**

File(F) Disconnect(D) Tool(T) Utility(U) View(V) Window(W) Help(H)

System Menu x 10.2 DIL Table & Port Settings

1.Configuration  
2.System  
3.Group  
4.Extension  
5.Optional Device  
6.Feature  
7.TRS  
8.ARS  
9.Private Network  
10.CO & Incoming Call  
1. CO Line Settings  
2.DIL Table & Port Settings  
3.DID Table  
4.Miscellaneous

OK(O) Cancel(C) Apply(A)

Set CO Line 1 to go to Virtual Extension when in Night Service.

DIL CLI for DIL TIE

Destination Setting(S)

No.	Slot	Port	Card Type	Trunk Property	Distribution Method	DIL Destination				Tenant Number	VM Trunk Group No.
						Day	Lunch	Break	Night		
1	2	1	LCOT4	Public	DIL	500	500	500	345	1	1
2	2	2	LCOT4	Public	DIL	500	500	500	500	1	1
3	2	3	LCOT4	Public	DIL	601	601	601	601	1	1
4	2	4	LCOT4	Public	DIL	601	601	601	500	1	1
5	5	1	SIP-GW4	Public	DID	601			601	1	1
6	5	2	SIP-GW4	Public	DID	601			601	1	1
7	5	3	SIP-GW4	Public	DID	601			601	1	1
8	5	4	SIP-GW4	Public	DID	601			601	1	1

## Add a Time Service (Night) Button to Ext 101.

**KXTDA-50 USB - KX-TDA50 Maintenance Console - [4. Extension - 1. Wired Extension - 4. Flexible Button]**

File(F) Disconnect(D) Tool(T) Utility(U) View(V) Window(W) Help(H)

System Menu x 4.1.4 Flexible Button

1.Configuration  
2.System  
3.Group  
4.Extension  
1. Wired Extension  
1. Extension Settings  
2.FWD/DND  
3.Speed Dial  
4.Flexible Button  
5.PF Button  
6.NDSS Link Data - Send  
7.Simplified Voice Message  
2.Portable Station  
3.DSS Console

OK(O) Cancel(C) Apply(A)

Copy to(I) Key Label Print(P)

Extension Number/Name 101 / Jim Smith

Form(E) Key Label File

Display Option

Key Setting  
Key Setting & Key Label Name

When Label Name is not programmed in this PC.

- Extension name or number is displayed for DSS key
- Speed dial name or programmed telephone number is displayed for one touch key.
- Above key setting with parameter is displayed for other keys.

601 500  
\*3301 Call Log-601  
Call Park  
500 \*52  
SCO-008 Time Service-001  
SCO-007  
SCO-006  
SCO-005  
SCO-004 SCO-016  
SCO-003 One-Touch  
SCO-002 \*3301  
SCO-001 DSS-107

Changing font is available by pressing the image of buttons.

**Change - Flexible Button 20**

Type: Time Service

Extension Number:

Dial (32 Digits):

Parameter 1: Day/Night

Parameter 2: Table 1

Mailbox Number:

Label (20 Characters):

Color of Font: Choose...(E)

Color of Background: Choose...(B)

Font Size: 8

Preview: Time Service-001

Apply these form data (Color of font, font size and color of background) to other buttons

OK(O) Cancel(C)

## Set Class of Service 1 AND 64 to Enable Time Service Switch.

**KXTDA-50 USB - KX-TDA50 Maintenance Console - [2. System - 7. Class of Service - 1. COS Settings]**

File(E) Disconnect(D) Tool(T) Utility(U) View(V) Window(W) Help(H)

System Menu

- 1. Configuration
- 2. System
- 3. Date & Time / Daylight Saving
- 4. Operator & BGM
- 5. Timers & Counters
- 6. Week Table
- 7. Holiday Table
- 8. Numbering Plan
- 9. Class of Service
- 10. 1. COS Settings
- 11. 2. External Call Block
- 12. 3. Internal Call Block

2.7.1 COS Settings

Set Class of Service 1 AND 64 to Enable Time Service Switch.

OK(O) Cancel(C) Apply(A)

TRS CO & SMDR Extension Features Programming & Manager Optional Device & Other Extensions Miscellaneous

COS No.	COS Name	Executive Busy Override Deny	Group Forward Set	Programming Mode Level	Manager	Time Service Switch
1		Disable	Enable-Group	PROG Only	Disable	Enable
2		Disable	Enable-Group	PROG Only	Disable	Disable
3		Disable	Enable-Group	PROG Only	Disable	Disable
4		Disable	Enable-Group	PROG Only	Disable	Disable
5		Disable	Enable-Group	PROG Only	Disable	Disable
6		Disable	Enable-Group	PROG Only	Disable	Disable
60		Disable	Enable-Group	PROG Only	Disable	Disable
61		Disable	Enable-Group	PROG Only	Disable	Disable
62		Disable	Enable-Group	PROG Only	Disable	Disable
63		Disable	Enable-Group	PROG Only	Disable	Disable
64		Disable	Enable-Group	PROG **/#	Enable	Enable

When you press the Night Button it will light up.

Calls coming into CO Line 1 will be sent to your Virtual Extension.

The Virtual Extension is Forwarded to the Answering Service.