

[Get a Quote](#)

## Overview

The WS-C2960S-48FPS-L is different from the WS-C2960S-48LPS-L in the PoE capabilities, because Cisco WS-C2960S-48FPS with Full PoE function can offer 740W PoE Power total with 24 ports up to 30W per switch ports or 48 ports up to 15.4W per switch port. But Cisco Catalyst Switch 2960S-48FPS-L and 2960S-48LPS-L share a similar datasheet with 4 One Gigabit Ethernet SFP uplink ports and optional Cisco FlexStack stacking supporting 20 Gbps of throughput. Both are Catalyst 2960-S models with LAN Base Software.

## Quick Specs

Figure 1 shows the appearance of the WS-C2960S-48FPS-L.

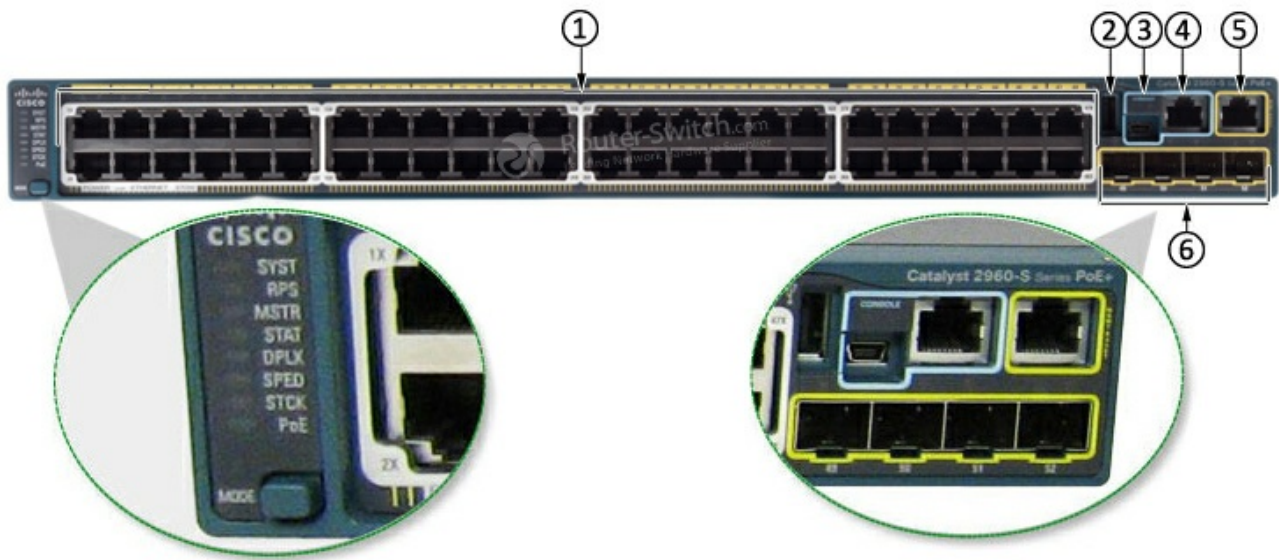


Table 1 shows the Quick Spec of the WS-C2960S-48FPS-L.

<b>Product Code</b>	WS-C2960S-48FPS-L
<b>Enclosure Type</b>	Rack-mountable - 1U
<b>Feature Set</b>	LAN Base
<b>PoE capacity</b>	740W
<b>Uplink Interfaces</b>	Four 1G Small Form-Factor Pluggable(SFP)
<b>Downlink Ports</b>	48 × Ethernet 10/100/1000 PoE+ ports
<b>Expansion Slot(s)</b>	1 (total) / 1 (free) × Stacking Module
<b>Switching capacity</b>	176 Gbps
<b>Forwarding/Filtering Rate:</b>	77.4 Mpps
<b>DRAM</b>	128 MB
<b>Flash Memory</b>	64 MB
<b>Dimensions</b>	44.5 × 38.6 × 4.5 cm
<b>Package Weight</b>	10.65 Kg

## Product Details


Figure 2 shows the front panel of the WS-C2960S-48FPS-L.



Note:

(1)	48 × Ethernet 10/100/1000 PoE+ ports	(4)	RJ45 Console Port
(2)	USB Type A Port	(5)	Ethernet Management Port
(3)	USB mini-Type B (console) Port	(6)	SFP Module Slots

Figure 3 shows the back panel of the WS-C2960S-48FPS-L.

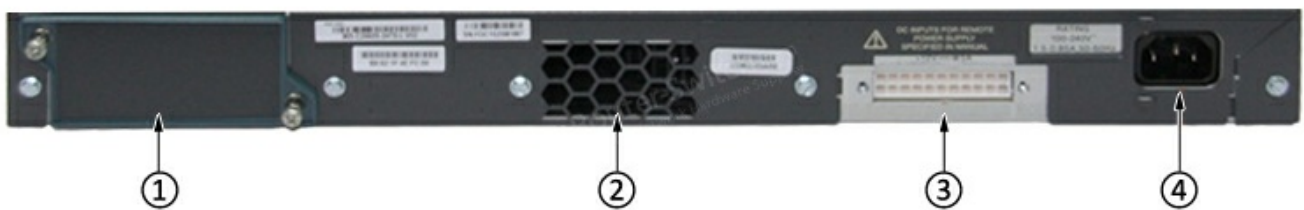

Note:

(1)	1 (total) / 1 (free) × Stacking Module	(3)	RPS Connector
(2)	Fan Exhaust	(4)	AC power connector

## The Accessories

Table 2 shows some accessories of the WS-C2960S-48FPS-L.

Models	Description
<a href="#">C2960S-STACK</a>	Catalyst 2960S FlexStack Stack Module optional for LAN Base
<a href="#">GLC-LH-SM</a>	GE SFP, LC connector LX/LH transceiver

<a href="#">GLC-SX-MMD</a>	1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
<a href="#">CAB-CONSOLE-RJ45</a>	Console Cable 6ft with RJ45 and DB9F

## Compare to Similar Items

Table 3 shows the comparison of similar items.

Models	<a href="#">WS-C2960S-48FPS-L</a>	<a href="#">WS-C2960S-48LPS-L</a>
Ports	48 × Ethernet 10/100/1000 PoE+ ports	48 × Ethernet 10/100/1000 PoE+ ports
PoE Capacity	740W	370W
Uplinks	4 x 1G SFP	4 x 1G SFP
Feature Set	LAN Base	LAN Base
Stackable	Yes	Yes

## Get more information

Do you have any question about the WS-C2960S-48FPS-L?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

<b>WS-C2960S-48FPS-L Specifications</b>	
<b>General Information</b>	
Manufacturer	Cisco
Product ID:	WS-C2960S-48FPS-L
Product Description:	Cisco CAT2960S Stack 48 Gige-POE 740W 4 x SFP LAN
Product Type:	Ethernet Switch
<b>Marketing Information</b>	
The Cisco Catalyst WS-C2960S-48FPS-L Ethernet Switch is the leading Layer 2 edge, providing improved ease of use, highly secure business operations, improved sustainability, and a borderless network experience. It include new Cisco FlexStack switch stacking capability with 1 and 10 Gigabit connectivity, and Power over Ethernet Plus (PoE+) with the Cisco Catalyst 2960 Switch offering fast Ethernet access connectivity and PoE capabilities. It is fixed-configuration access switch designed for enterprise, midmarket, and branch office networks to provide lower total cost of ownership.	
<b>Interfaces/Ports</b>	
Number of Ports:	48
Gigabit Ethernet Port:	Yes
Interfaces/Ports:	48 x RJ-45 10/100/1000Base-T PoE LAN
<b>Media &amp; Performance</b>	
Forwarding/Filtering Rate:	77.4 Mpps
Switching Throughput:	176 Gbps
<b>I/O Expansions</b>	
Number of Expansion Slots:	5

Expansion Slots:	(4 Total) SFP (mini-GBIC) Uplink
	(1 Total) Stacking Module
<b>Network &amp; Communication</b>	
Layer Support:	2
<b>Management &amp; Protocols</b>	
Manageable:	Yes
Management:	DHCP QoS VLAN SNMP v1, v2, v3 Syslog CLI RMON CiscoWorks LAN Management Solution
<b>Memory</b>	
Standard Memory:	128MB
Memory Technology:	DRAM
Flash Memory:	64MB
<b>Software</b>	
Operating System:	Cisco IOS
<b>Power Description</b>	
Power Over Ethernet:	Yes
Power Source:	Power Supply
Redundant Power Supply:	Yes
<b>Physical Characteristics</b>	
Compatible Rack Unit:	1U
Form Factor:	Rack-mountable
	Stackable
Dimensions:	1.75" Height x 17.50" Width x 15.20" Depth
Weight (Approximate):	13 lb

## Download Resource

---

### Transition Guide

 [Cisco Catalyst 2960/2960-SF/2960-S Series Transition Guide](#)

 [Guide to Upgrade Cisco Access and Backbone Switch](#)

 [Selecting Cisco Switches-Campus, Branch, Digital Building](#)

Want to Buy

---

[Order Now](#)[Get a Quote](#)

## Why Router-switch.com

---

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



16,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)