

## Panasonic NS-700 Automatic Paging Time Based Telquest Tech Support


**Automatic Paging** can play a pre-recorded message (OGM) to a selected Conference Group at a Preset Time.

It can also repeat that message several times.

You can create up to 24 different times for Automatic Paging.

Enable the “Conference Group Call Operation” in the Class of Service (COS) settings:

**Extensions in the COS selected below will be allowed to Initiate the Message**

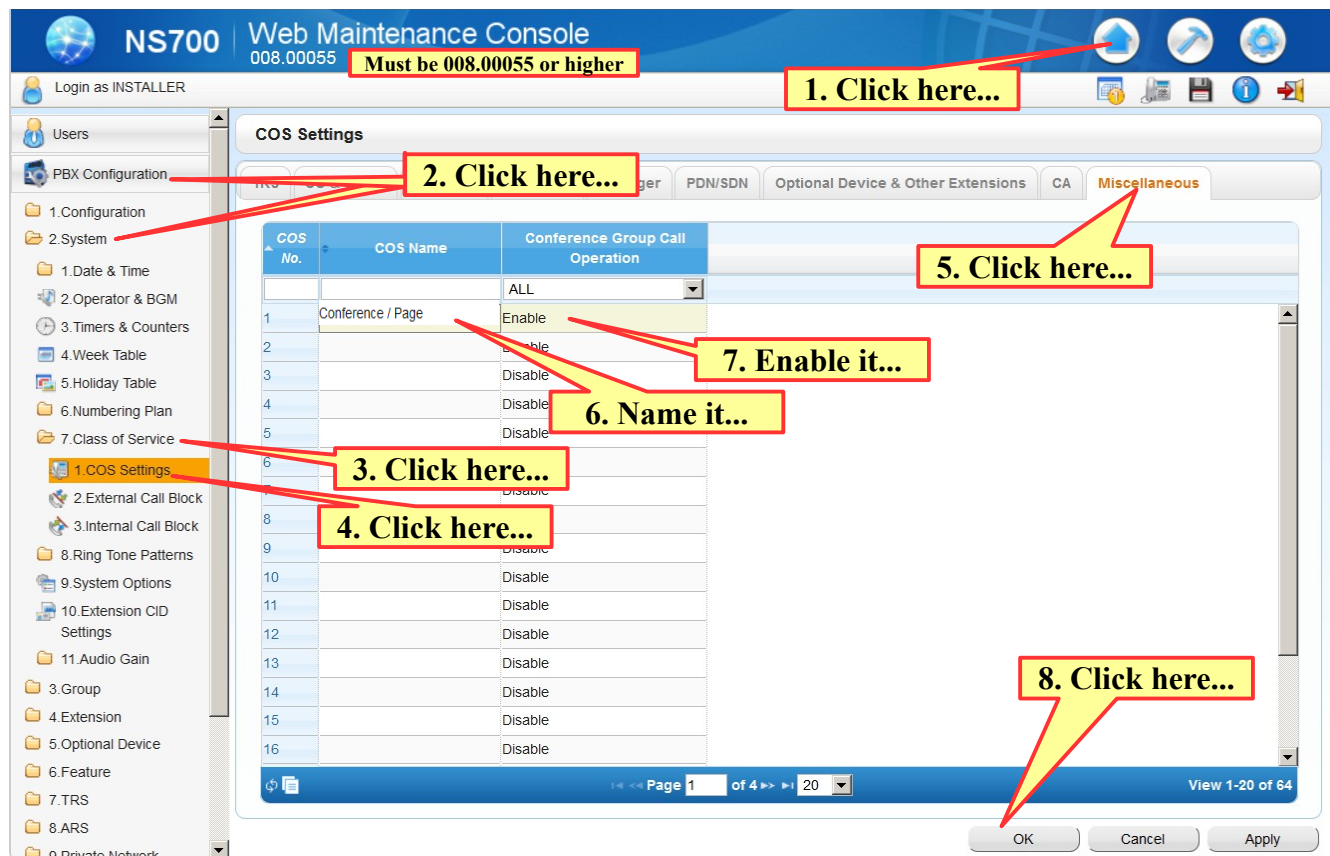

**NS700 Web Maintenance Console**  
008.00055 Must be 008.00055 or higher

1. Click here...

2. Click here...

3. Click here...

4. Click here...

5. Click here...

6. Name it...

7. Enable it...

8. Click here...

COS No.	COS Name	Conference Group Call Operation
		ALL
1	Conference / Page	Enable
2		Disable
3		Disable
4		Disable
5		Disable
6		Disable
7		Disable
8		Disable
9		Disable
10		Disable
11		Disable
12		Disable
13		Disable
14		Disable
15		Disable
16		Disable

Page 1 of 4

View 1-20 of 64

OK Cancel Apply

### Note:

By default, all Digital Extensions (except 101) are in COS 1.

By default, all NT phones are in COS 31 and may need to be moved to the correct COS.

The example above does use COS 1, so all extensions in COS 1 can receive the message.

## Assign extensions to Class of Service

**NS700 Web Maintenance Console**  
008.00055

Login as INSTALLER

**Extension Settings**

Copy to: **1. Click here...**

« **Main** | Intercept Destination | Intercept No Answer Time | CLIP | UM | Option 1 | Option 2 | Option 3 | Option 4 | Option 5 »

No.	Extension Number	Extension Name (20 characters)	Telephone Type	User Group	COS	Extension PIN
1	101	Receptionist	DPT (T76xx/DT)	1	1	Edit
2	102		DPT (T76xx/DT)	1	1	Edit
3	103		No Connection	1	1	Edit
4	104		No Connection	1	1	Edit
5	105		UNKNOWN	1	1	Edit
6	106		UNKNOWN	1	1	Edit
7	107		UNKNOWN	1	1	Edit
8	108		UNKNOWN	1	1	Edit
9	109		UNKNOWN	1	1	Edit
10	110		UNKNOWN	1	1	Edit
11	111		UNKNOWN	1	1	Edit
12	112		UNKNOWN	1	1	Edit
13	113		UNKNOWN	1	1	Edit
14	114		UNKNOWN	1	1	Edit

**2. Click here...**

**3. Click here...**

**5. Set COS...**

**4. Scroll to the Right >>>**

Page 1 of 2 of 100 View 1-100 of 108

OK Cancel Apply

**6. Click here...**

Set applicable Conference Group Auto Answer setting for receiving the paging call:

NS700

Web Maintenance Console

008.00055

Login as INSTALLER

Users

PBX Configuration

1. Configuration

2. System

3. Group

1. Trunk Group

2. User Group

3. Call Pickup Group

4. Paging Group

5. Incoming Call Distribution Group

6. Extension Hunting Group

7. UM Group

8. PS Ring Group

9. Conference Group

10. P2P Group

11. VM(DPT) Group

12. VM(DTMF) Group

4. Extension

5. Optional Device

6. Feature

7. TRS

8. ARS

9. Private Network

10. CO & Incoming Call

Conference Group

Member List

Timed Broadcasting

Conference Group Number	Conference Group Name	Broadcast to	Ability to Talk	Automatic Answer w/o Extension Setting
		ALL	ALL	ALL
1	Conference / Page	Disable	Enable	Enable
2		Disable	Enable	Disable
3		Disable	Enable	Disable
4		Disable	Enable	Disable
5		Disable	Enable	Disable
6		Disable	Enable	Disable
7		Disable	Enable	Disable
8		Disable	Enable	Disable

Page 1 of 120

View 1-8 of 8

OKCancelApply

5. Click here...

3. Name it...

1. Click here...

4. Enable it...

2. Click here...

Recorded message can be broadcast automatically at preset times in a day.

**NS700 Web Maintenance Console**  
008.00055

Login as INSTALLER

**Conference Group**

Member List Timed Broadcasting

Conference Group Number	Conference Group Name	Broadcast Mode	Ability to Talk	Automatic Answer w/o Extension Setting
		ALL	ALL	ALL
1	Conference / Page	Enable	Enable	Enable
2		Enable	Enable	Disable
3		Enable	Enable	Disable
4		Disable	Enable	Disable
5		Disable	Enable	Disable
6		Disable	Enable	Disable
7		Disable	Enable	Disable
8		Disable	Enable	Disable

Page 1 of 20 View 1-8 of 8

OK Cancel Apply

**1. Click here...**

**NS700 Web Maintenance Console**  
008.00055

Login as INSTALLER

**Timed Broadcasting**

No.	Setting	Start Time	Conference Group	OGM Number	Repeat Counter
1	Enable	00:00	1.Conference / Page	1:501:DISA 01	1
2	Disable	00:00	1.Conference / Page	1:501:DISA 01	1
3	Disable	00:00	1.Conference / Page	1:501:DISA 01	1
4	Disable	00:00	1.Conference / Page	1:501:DISA 01	1
5	Disable	00:00	1.Conference / Page	1:501:DISA 01	1

Which Group Which OGM Repeat Times

**3. This will appear...**

	Hour												Minute																																			
AM	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14																		
	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44									
PM	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59

**4. Set the time to play...**  
Example shows 3:00 PM

**5. Click here...**

OK Cancel Apply

Detailed view of each area

Built-In Automatic Paging (Broadcast Recorded Message)

Timed Broadcast

Recorded message can be broadcast automatically at preset times in a day.

PBX Configuration

3.Group

9.Conference Group

Conference Group

Member List

Timed Broadcasting

Conference

Hour												Minute																		
AM	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14
	06	07	08	09	10	11	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29									
PM	12	13	14	15	16	17	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44									
	18	19	20	21	22	23	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59									

Timed Broadcasting

No.	Setting	Start Time	Conference Group	OGM Number	Repeat Counter
1	Enable	13:22	1:	1:5801:DISA 01	1
2	Disable	00:00	1:	1:5801:DISA 01	1
3	Enable	00:00	1:	1:5801:DISA 01	1

Group: 1-8

1: 1:5801:DISA 01  
2: 1:5802:DISA 02  
3: 5803:DISA 03

DISA OGM No. 1-64

Repeat Counter: 1-9

1  
2  
3  
4  
5  
6  
7  
8  
9

Portable Station

Registration De-reg

Personal Identification Num

Index	Extension No.
126	
127	
128	

DECT phone cannot be registered to PS No.128. Keep this entry BLANK.

## Add members to the Selected Conference Group

**NS700 Web Maintenance Console**  
008.00055

Login as INSTALLER

**Conference Group Member**

Member list copy Extension No. Setting

Conference Group No.: 1 : Conference / Page

No.	Dial Number	Extension Name
1	101	Receptionist
2	102	
3	103	
4	104	
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		

Page 1 of 20 View 1-20 of 31

OK Cancel Apply

**1. Select Group...**

**2. Add Members that will receive the Message**

**3. Click here...**