

Panasonic NS-700 Shared Extension Telquest Tech Support

Note:

In this example, Extension 101 is the Primary Extension and 105 is the Shared Extension.

Only 1 phone can be used at any time.


Only the Primary Digital Phone can receive Paging Announcements.

Calls FROM the Shared Extension will send the Caller ID of the Primary Extension.

The Message Waiting LED will come on BOTH phones when there is a message in Voice Mail.

Note: Only the NS-700 allows 3rd Party SIP. The NS-700G does not allow 3rd Party SIP.

The Shared Extension can be a 3rd Party SIP Extension which can be a Softphone in a cell phone.

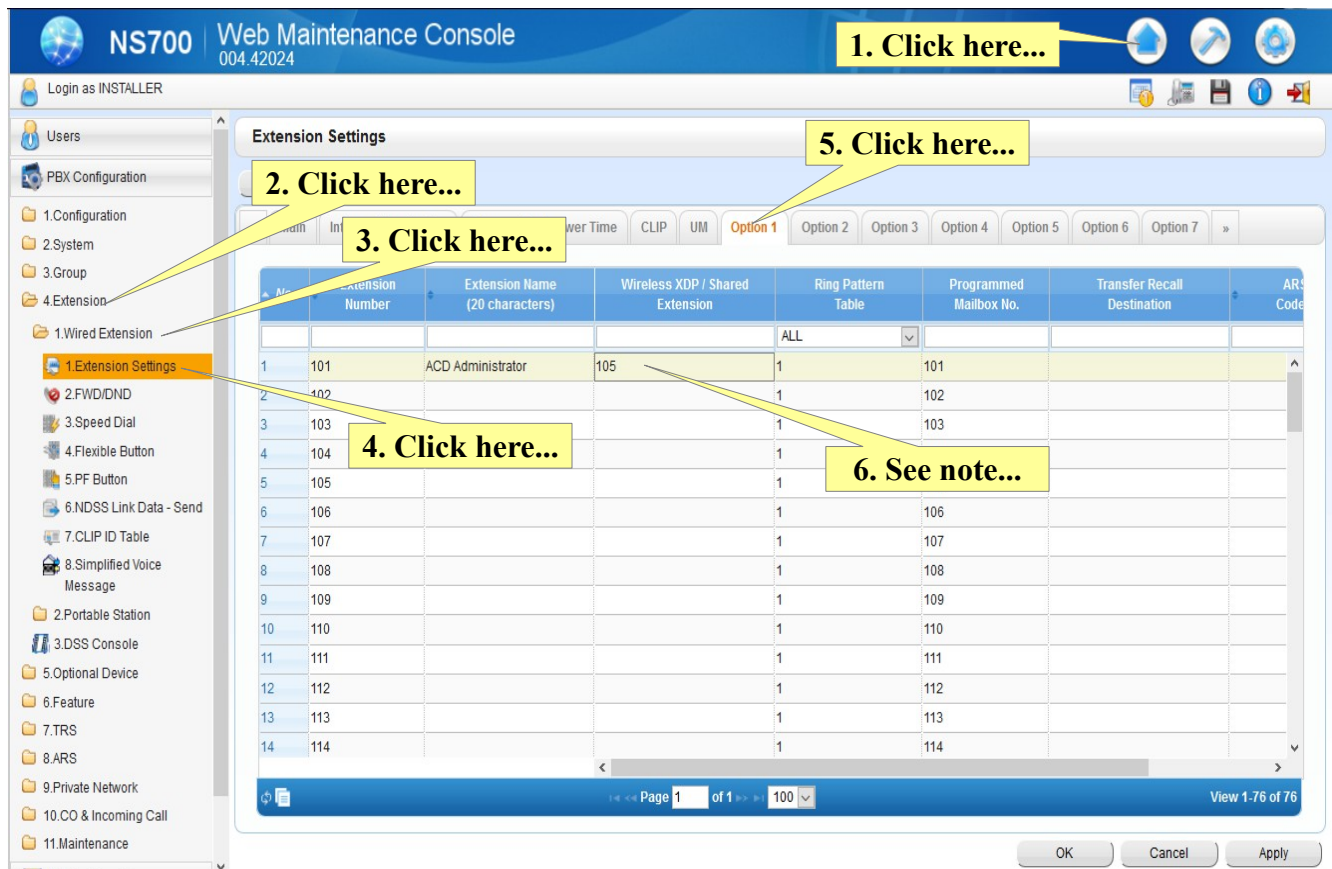

1. Click here...

2. Click here...

3. Click here...

4. Click here...

5. Click here...

6. See note...

Al	Extension Number	Extension Name (20 characters)	Wireless XDP / Shared Extension	Ring Pattern Table	Programmed Mailbox No.	Transfer Recall Destination	ARS Code
1	101	ACD Administrator	105	1	101		
2	102			1	102		
3	103			1	103		
4	104			1			
5	105			1			
6	106			1	106		
7	107			1	107		
8	108			1	108		
9	109			1	109		
10	110			1	110		
11	111			1	111		
12	112			1	112		
13	113			1	113		
14	114			1	114		

Page 1 of 100 View 1-76 of 76

OK Cancel Apply

Note: If both extensions are Digital phones, the call can be switched between the 2 phones by pressing the CO Line Key that the call came in on.

This will cut the call off of one phone and connect it to the other.

The two phones cannot be on the call at the same time.

If one extension is a Digital phone and the other is an Analog phone and the Analog phone answers the call, the Digital phone can switch the call to itself by pressing the CO Line Key.

If the Digital phone has control of the call, the Analog phone cannot switch the call to itself.