

Avaya IP Office Partner Edition

Using a 1400 Type Phone for System Programming

Telquest Tech Support

Old ACS Codes
Not useable here...

Category	Setting	Access Type	Code
System Settings	Recall timer ^[46]	System Administration	107
	Log Caller ID Extensions ^[47]	System Administration	317
		System Administration	318
		System Administration	319
Date and Time	Automatic Daylight Saving ^[31]	System Administration	126
	Network Time Synch ^[30]	System Administration	128
	System Date ^[28]	System Administration	101
	System Time ^[29]	System Administration	103
Line Settings	Number of Lines ^[21]	System Administration	104
	Line Assignment ^[22]	System Administration	301
	Line Coverage Extension ^[23]	System Administration	208
	Co Disconnect Time ^[25]	System Administration	203
	Line Ringing ^[102]	Centralized Programming / Telephone Programming (view only)	<button>
	Auto Line Selection ^[26]	Centralized Programming	-
Auxiliary Equipment	Contact Close Grp ^[53]	System Administration	612
	Type - Contact Close ^[54]	System Administration	613
	Doorphone 1 Extension ^[51]	System Administration	604
	Doorphone 2 Extension ^[51]	System Administration	605
	Doorphone Alert Ext ^[52]	System Administration	606
	Internal Hotline Ext ^[74]	System Administration	603
	Loudspeaker Paging Ext ^[58]	System Administration	617
	Fax Machine Extension ^[58]	System Administration	601
Dialing Restrictions and Permissions	Allowed Lists ^[35]	System Administration	407
	Allow To ^[36]	System Administration	408
	Disallowed Lists ^[37]	System Administration	404
	Disallow To ^[39]	System Administration	405
	Emergency List ^[40]	System Administration	406
	Outgoing Call Restr ^[41]	System Administration	401
	Set System Password ^[43]	System Administration	403

Category	Setting	Access Type	Code
	Toll Call Prefix 44	System Administration	402
Speed Dials	Personal Speed Dial 61	Centralized Programming / Telephone Programming	80-99
	System Speed Dials 59	Telephone Programming (extensions 10 and 11 only)	600-699
Extension Settings	Automatic Extension Privacy 76	System Administration	304
	Extension Name 67	Centralized Programming / Telephone Programming	-
	Button Programming 111	Centralized Programming / Telephone Programming	<button>
	Display Language 69	System Administration	303
	Call Waiting 70	System Administration	316
	Intercom Dial Tone 71	System Administration	309
	External Hotline 72	System Administration	311
	Outside Conference Denial 78	System Administration	109
	Remote Call Forward 42	System Administration	322
Account Codes	Forced Account Code 80	System Administration	307
	Forced Act Code List 79	System Administration	409
Voicemail	VMS Cover 83	System Administration	310
	VMS Coverage Rings 84	System Administration	321
	Reset Voice Mail Pwd 85	System Administration	324
	VMS Hunt Delay 86	System Administration	506
	VMS Hunt Schedule 87	System Administration	507
Groups	Calling Group 91	System Administration	502
	Group Call Distrib 24	System Administration	206
	Hunt Group 92	System Administration	505
	Night Service Button 94	System Administration	504
	Night Service Grp Ext 93	System Administration	503
	Pickup Group 95	System Administration	501
Ring Settings	Abbreviated Ringing 99	System Administration	305
	Call Coverage Rings 106	System Administration	320
	Distinctive Ringing 101	System Administration	308
	Ring Pattern 105	System Administration	323
	Ringing on Transfer 104	System Administration	119
	Transfer Return 103	System Administration	105
Holding Calls	Hold Timer 108	System Administration	127
	Music on Hold 107	System Administration	602
System Maintenance	Clear Backup Alarm 153	System Administration	123
	Manual Backup 154	System Administration	124
	Restore 155	System Administration	125
	Copy Settings 151	System Administration	399
	Remote Admin Password 152	System Administration	730
	System Default 157	System Administration	989
	System Copy 156	System Administration	732
	System Reset 158	System Administration	728
	System Shutdown 159	System Administration	729
	System Upgrade 160	System Administration	731

Avaya IP Office Partner Edition

Using a 1400 Type Phone for System Programming

Telquest Tech Support

You can use this method to program the system with a 1408 or 1416 phone.

You can not talk on the phone when programming.

This must be done from Ext 10 or Ext 11

Leave the handset in the cradle

Press the Softkey under the LCD word Admin

Use the Up and Down Arrows on the navigation disc to select the Access Type” desired

Press the OK button in the center of the navigation disc when you have made your choice

Dial # (POUND) followed by the Code that represents the Setting you want to change


Use the keypad to enter your choices

Note: in most cases 1, 2, 3 and 4 on the keypad will be used to make selections


When you have made your selection, press the OK button to save it

Press the PHONE?EXIT button to end programming

Telquest Tech Support

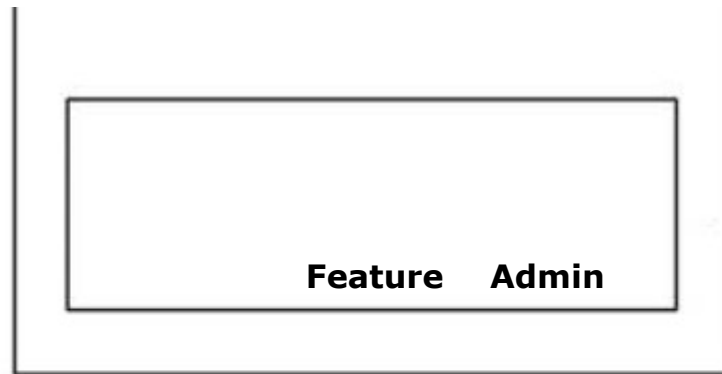

Softkey

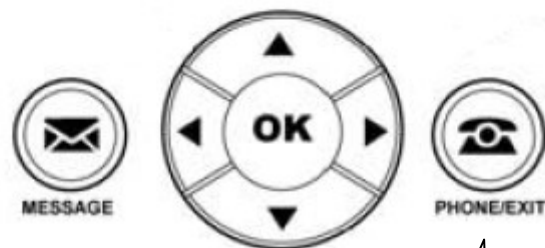

Navigation Disc

PHONE/EXIT