

# Avaya IP Office Standard Mode External Page Via Spare CO Line Port Telquest Tech Support

If you connect a Page Adapter to a spare CO Line Port of the KSU, there is no audio passed from the KSU to the Page Adapter until you dial a single digit.

This can be overcome by creating a Short Code that selects the CO Line Port that is being used and then sending it a short DTMF to open the audio path.

**We are here...**



**1. Click here...**

**2. Select a Spare Trunk...**

**3. Put it in its own Group...**

**4. Click here...**

**5. Set like this...**

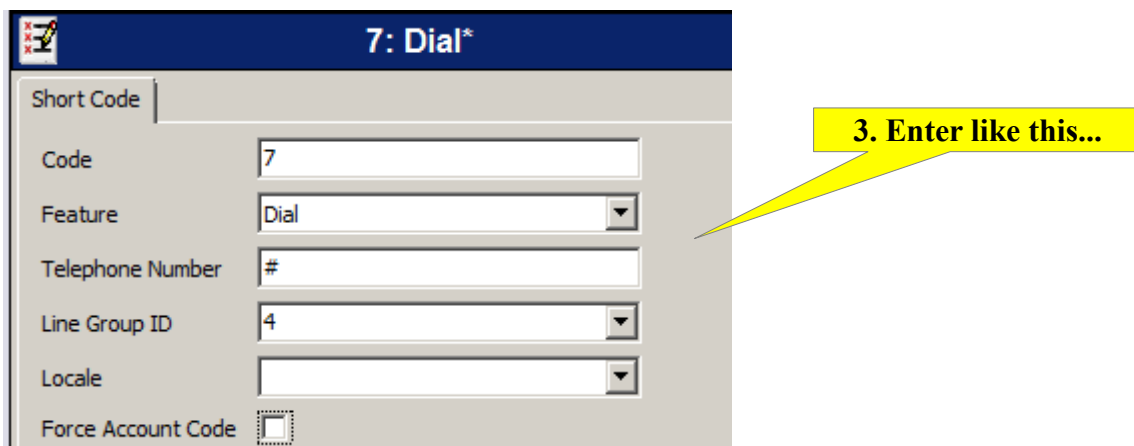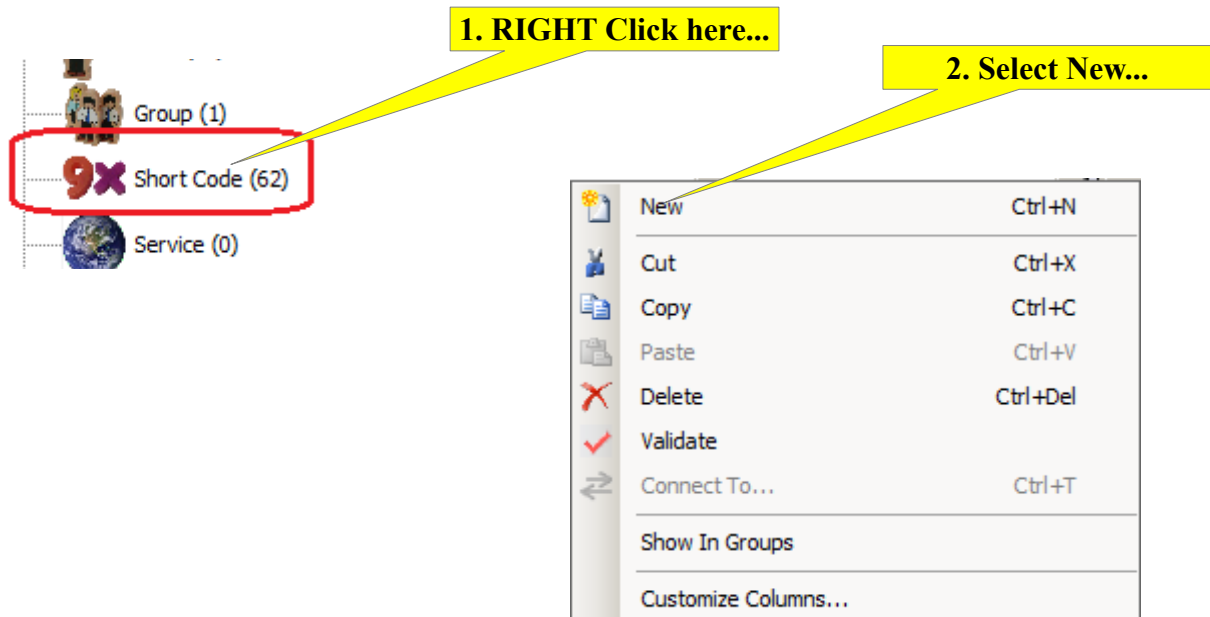

**Note:**

**You can use any Short Code that you like as long as it does not conflict with an existing one.**

**I am using 7 as an Example.**

You can also assign the External Page to a button like this:

**1. Click here...**

**2. Select a User...**

**3. Click here...**

**4. Set the button like this...**

Button ...	Label	Action	Action Dat
1		Appearance	a=
2		Appearance	b=
3		Appearance	c=
4	Page	Dial	7
5			
6			
7			
8			
9			
10			
11			

### Operation:

You can go to any telephone, press one of the Intercom Buttons, dial 7 and make your announcement.

If you have a Page Button programmed on your phone, just press it and make your announcement.