

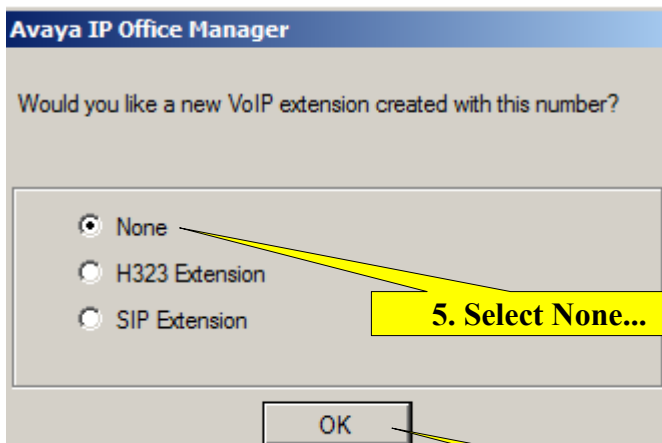


Avaya IP Office Remote Recording for Auto Attendant Telquest Tech Support

This is a workaround since there is no built in function to do this...

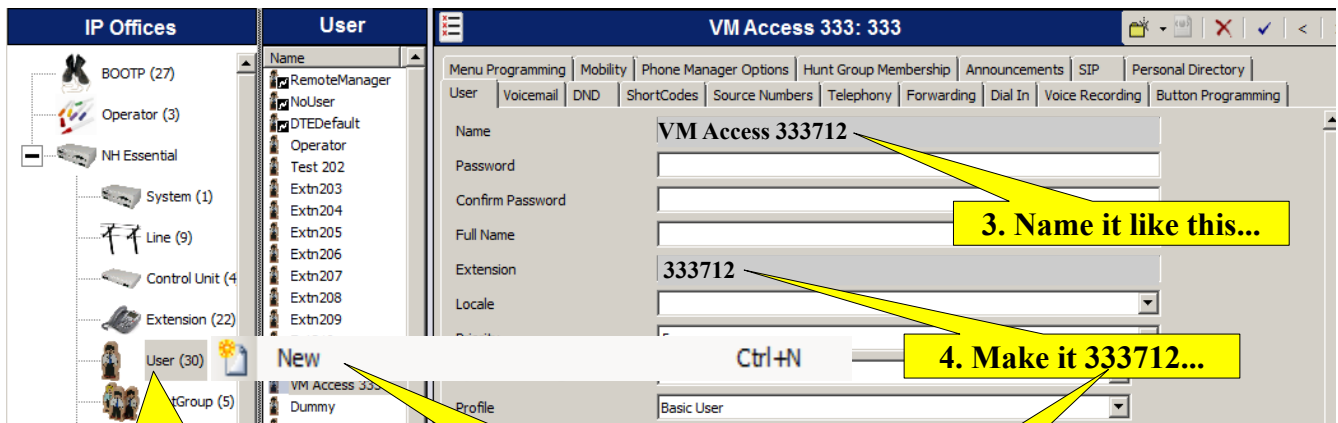

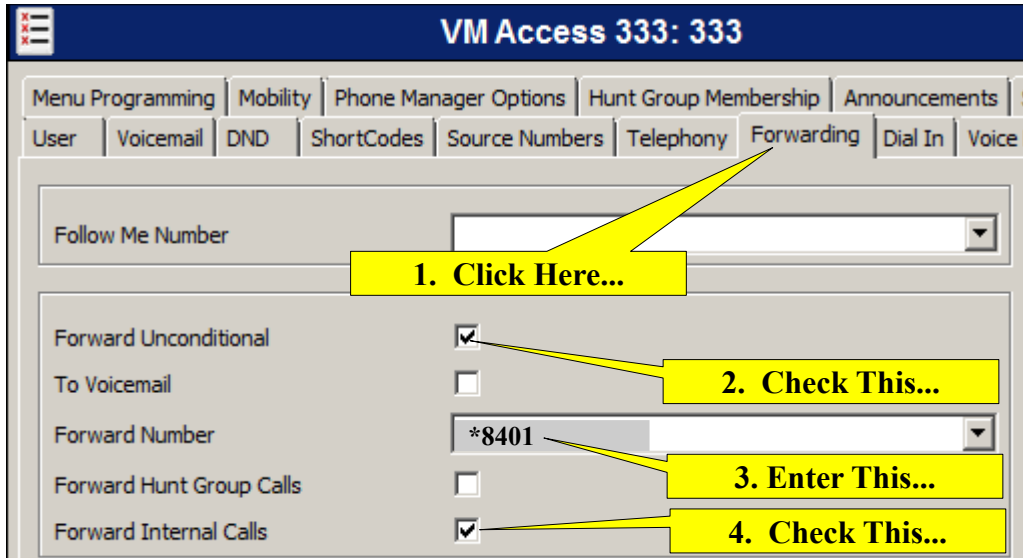

Note:

***8401 is for Auto Attendant 1.**

If you are using a different Auto Attendant then use the correct number.

Operation:

Call into the system.

When answered by the Auto Attendant, dial the extension number that was used on Page 1.

In my example I used extension 333712.

Extension number 333712 actually becomes the password.

You can then dial:

1 to listen to the current Auto Attendant Greeting

2 to record a new Greeting

3 save the Greeting