


Page

Panasonic KXTDA-50 Conference Group / Page All Portable Stations Telquest Tech Support

You must first create each Portable Station.

I made mine Extension No. 331-335 for ease of programming.

You will also need to Register each Portable Station, this is not covered in this Help Sheet.

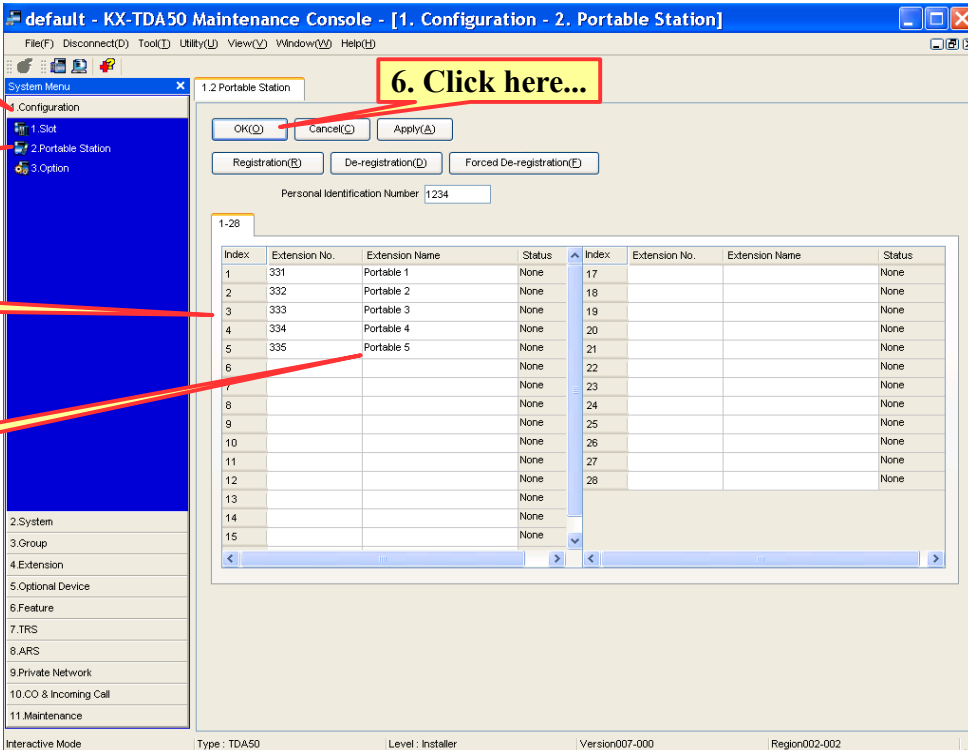

1. Click here... (points to the '1.2 Portable Station' tab)

2. Click here... (points to the '1 Slot' menu item)

3. Add each... (points to the 'Add' button)

4. Name them... (points to the 'Extension Name' column header)

6. Click here... (points to the 'OK' button)

Index	Extension No.	Extension Name	Status
1	331	Portable 1	None
2	332	Portable 2	None
3	333	Portable 3	None
4	334	Portable 4	None
5	335	Portable 5	None
6			None
7			None
8			None
9			None
10			None
11			None
12			None
13			None
14			None
15			None
17			None
18			None
19			None
20			None
21			None
22			None
23			None
24			None
25			None
26			None
27			None
28			None

Allow Conference Group Call Operation in Class of Service 1 (COS1).

Note: All phones are in COS1 by default.

1. Click here...

2. Click here...

3. Click here...

4. Click here...

5. Enable it...

6. Click here...

COS No.	COS Name	Conference Group Call Operation
1		Enable
2		Disable
3		Disable
4		Disable
5		Disable
6		Disable
7		Disable
8		Disable
9		Disable
10		Disable
11		Disable
12		Disable
13		Disable
14		Disable
15		Disable
16		Disable
17		Disable
18		Disable
19		Disable
20		Disable
21		Disable
22		Disable

Interactive Mode Type : TDA50 Level : Installer Version007-000 Region002-002

Name the Conference Group and add Members.

1. Click here...

2. Click here...

3. Name it...

4. Click here...

5. Click here...

Conference Group Number	Conference Group Name
1	Portable Page
2	
3	
4	
5	
6	
7	
8	

1. You are here...

2. Add Extensions...

3. Click here...

Note: Names will appear the next time you open this screen.

No.	Dial Number	Extension Name
1	331	Portable 1
2	332	Portable 2
3	333	Portable 3
4	334	Portable 4
5	335	Portable 5
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		

Operation

To make an announcement to the Portable Stations in Conference Group 1:

Press the Intercom Button on your phone

Dial *321 (STAR 3 2 1)

You will hear a beep

When the beep ends, you can make your announcement.

Special Conditions:

You must have each Portable Station set to Auto Answer on the handset.

It is NOT possible to Page the Portable Stations and the Desk phones at the same time.

You will need to dial *321 to Page the portable stations and then hang up and dial *3301 to Page all other phones.